


APOLLO NL 1

(Cod. A1)



Tubo in PVC-P super elastico di colore grigio con spirale in PVC rigido antiurto di colore azzurro. Speciale formulazione studiata per mantenere un'elevata flessibilità anche a basse temperature. La sua struttura con **spirale a vista** consente di ridurre l'attrito durante lo scorrimento del tubo sul suolo. Completamente liscio interno e leggermente corrugato esternamente, il tubo resiste ad agenti atmosferici ed a numerose sostanze chimiche. Su richiesta disponibile la versione antistatica con cordicella di rame.

- Spurghi ed agricoltura aspirazione e mandata di acque reflue, liquidi industriali; particolarmente adatto all'impiego su carri botte grazie alle sue proprietà fisico-meccaniche.


Grey plasticized PVC hose manufactured with super elastic material and reinforced with anti-shock rigid PVC spiral. Special formulation conceived for keeping high flexibility even at low temperatures. Its exposed spiral allows less resistance to dragging.

Inside smooth and corrugated outside, it resists to weather agents and to most chemicals. The antistatic version with copper wire is available on request.

- In Waste Management and agriculture, excellent solution for suction and discharge of industrial water, slurries and liquids; particularly suitable to be used on tank trucks.

Spirale in PVC rigido antiurto
Anti-shock rigid PVC spiral

Tubo in PVC-P / PVC-P hose

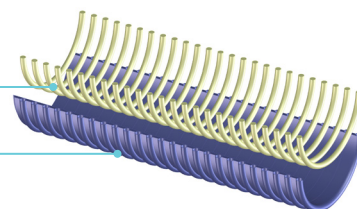

Scheda tecnica / Technical data

Codice	Ø Int.	Spess. Min.	Spess. Max	Peso	P.E.	P.S.	Depr.	R. Curvatura	Lg. Rotolo
Code	Ø Int.	Min wall th.	Max wall th.	Weight	W.P.	B.P.	Vac.	Bending	Coil lgth.
	mm/inch	mm	mm	g/m	[bar]	[bar]	m H ₂ O	mm	m
A1010254000000	25,4*/1"	2,7	3,8	340	5,0	15	8	130	50
A1010320000000	31,8*/1.1/4"	3,0	4,3	500	5,0	15	8	130	50
A1010380000000	38,1*/1.1/2"	3,3	4,8	650	4,2	12,5	8	140	50
A1010390000000	39*	3,3	4,8	670	4,2	12,5	8	140	50
A1010500000000	50*	3,6	5,3	940	3,5	10,5	8	180	50
A1010515000000	51,5*	3,6	5,3	970	3,5	10,5	8	180	50
A1010520000000	50,8*/2"	3,6	5,3	950	3,5	10,5	8	180	50
A1010570000000	57*	3,8	5,6	1140	3,0	9	8	205	50
A1010630000000	63,5*/2.1/2"	3,9	5,8	1320	3,0	9	8	230	50
A1010650000000	65*	4,2	5,9	1410	3,0	9	8	240	50
A1010760000000	76*	4,2	6,2	1620	3,0	9	8	290	50
A1010770000000	77,7*	4,2	6,2	1650	3,0	9	8	295	50
A1010800000000	80*	4,3	6,6	1740	2,5	7,5	8	300	30
A1010900000000	90*	4,4	6,8	2020	2,5	7,5	8	340	30
A1011000000000	100*	4,8	7,7	2530	2,0	6	8	380	30
A1011020000000	102*/4"	4,8	7,7	2580	2,0	6	7	380	30
A1011050000000	105*	4,9	7,7	2670	2,0	6	7	395	30
A1011100000000	110*	5,1	7,8	2830	2,0	6	7	415	30
A1011200000000	120*	5,1	8,1	3190	2,0	6	7	450	30
A1011270000000	127*/5"	5,2	8,2	3430	2,0	6	7	500	30
A1011500000000	151,5*	6,1	9,4	4800	1,5	4,5	7	630	20
A1011520000000	152,4*/6"	6,1	9,4	4830	1,5	4,5	7	630	20
A1011600000000	160*	6,5	10,2	5320	1,3	4	6	750	20
A1012000000000	200*	8,3	12,5	8580	1,0	3	6	900	10
A1012030000000	203,2*/8"	8,3	12,5	8710	1,0	3	6	900	10

*Disponibile su richiesta, per quantitativi da concordare con l'ufficio vendite / *Available on request, contact our sales office for more info and quantities

I dati tecnici qui riportati sono stati misurati a 23°C e al 50% di umidità / The technical data here reported were measured at 23°C with 50% humidity