


APOLLO NL 1

(Cod. A1)



Tubo de PVC-P muy elástico de color gris con espiral de PVC rígida antichoque de color celeste. Fórmula especial específica para mantener una alta flexibilidad, incluso a bajas temperaturas. Estructura con espiral a vista, consiente la reducción de la fricción durante su desplazamiento. Completamente liso al interno y ligeramente corrugado al externo, resiste a los agentes atmosféricos y a numerosas sustancias químicas. Versión antiestática (con hilo de cobre) bajo pedido.

• Óptimo para aspiración y paso de líquidos de aguas residuales, líquidos industriales, especialmente eficaz para su uso en camiones cisternas gracias a sus propiedades físico-mecánicas.


Grey plasticized PVC hose manufactured with super elastic material and reinforced with anti-shock rigid PVC spiral. Special formulation conceived for keeping high flexibility even at low temperatures. Its exposed spiral allows less resistance to dragging.

Inside smooth and corrugated outside, it resists to weather agents and to most chemicals. The antistatic version with copper wire is available on request.

• In Waste Management and agriculture, excellent solution for suction and discharge of industrial water, slurries and liquids; particularly suitable to be used on tank trucks.

Espiral de PVC rígido antichoque
Anti-shock rigid PVC spiral

Tubo de PVC-P / PVC hose

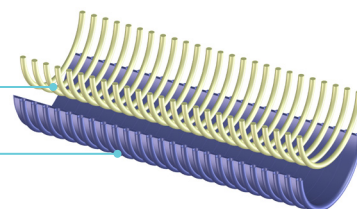

Ficha técnica / Technical data

Código	Ø int.	Min esp.	Max esp.	Peso	P.T.	P.R.	Vacio	R. de curvatura	Lg. Rollo
Code	Ø Int.	Min wall th.	Max wall th.	Weight	W.P.	B.P.	Vac.	Bending	Coil lgth.
	mm/inch	mm	mm	g/m	[bar]	[bar]	m H ₂ O	mm	m
A1010254000000	25,4*/1"	2,7	3,8	340	5,0	15	8	130	50
A1010320000000	31,8*/1.1/4"	3,0	4,3	500	5,0	15	8	130	50
A1010380000000	38,1*/1.1/2"	3,3	4,8	650	4,2	12,5	8	140	50
A1010390000000	39*	3,3	4,8	670	4,2	12,5	8	140	50
A1010500000000	50*	3,6	5,3	940	3,5	10,5	8	180	50
A1010515000000	51,5*	3,6	5,3	970	3,5	10,5	8	180	50
A1010520000000	50,8*/2"	3,6	5,3	950	3,5	10,5	8	180	50
A1010570000000	57*	3,8	5,6	1140	3,0	9	8	205	50
A1010630000000	63,5*/2.1/2"	3,9	5,8	1320	3,0	9	8	230	50
A1010650000000	65*	4,2	5,9	1410	3,0	9	8	240	50
A1010760000000	76*	4,2	6,2	1620	3,0	9	8	290	50
A1010770000000	77,7*	4,2	6,2	1650	3,0	9	8	295	50
A1010800000000	80*	4,3	6,6	1740	2,5	7,5	8	300	30
A1010900000000	90*	4,4	6,8	2020	2,5	7,5	8	340	30
A1011000000000	100*	4,8	7,7	2530	2,0	6	8	380	30
A1011020000000	102*/4"	4,8	7,7	2580	2,0	6	7	380	30
A1011050000000	105*	4,9	7,7	2670	2,0	6	7	395	30
A1011100000000	110*	5,1	7,8	2830	2,0	6	7	415	30
A1011200000000	120*	5,1	8,1	3190	2,0	6	7	450	30
A1011270000000	127*/5"	5,2	8,2	3430	2,0	6	7	500	30
A1011500000000	151,5*	6,1	9,4	4800	1,5	4,5	7	630	20
A1011520000000	152,4*/6"	6,1	9,4	4830	1,5	4,5	7	630	20
A1011600000000	160*	6,5	10,2	5320	1,3	4	6	750	20
A1012000000000	200*	8,3	12,5	8580	1,0	3	6	900	10
A1012030000000	203,2*/8"	8,3	12,5	8710	1,0	3	6	900	10

*Disponible bajo demanda. Consulte con ventas para más información y cantidades / *Available on request, contact our sales office for more info and quantities

Los datos técnicos aquí reportados fueron medidos a 23°C con 50% de humedad / The technical data here reported were measured at 23°C with 50% humidity