


EOLO HT 180°C

(Cod. H1)



SISTEMA DE CONEXIÓN
CONNECTION SYSTEM
SUGGESTED

Abrazaderas doble puente W2
Double bridge W2



Cod. F2 W2 - Ø 76-406

Tubo de color gris realizado con tejido de poliéster recubierto de TPU autoextinguible. Espiral de refuerzo en acero incorporada entre los dos extractos. Auto-extinguible según UL 94 V0, NFP 92503 (M1) y NF EN 2310 /FAR25-853-a). Exento de silicona, plastificantes y ftalatos.


• Ventilación industrial, aspiración de gases, humos de soldadura, usado en la industria mecánica, automovilística y plástica.

Gray duct made with flame resistant TPU coated polyester fabric and reinforced by steel helix welded between the two layers. The material is flame retardant V(TM)-0 according to UL 94, grade M1 according to NF P 92-503 and in compliance with NF EN 2310, grade FAR25-853-a. **SILICON FREE**, it is also free from phthalates and softener.

• Civil and naval conditioning plants, ventilation systems, suction of welding fumes, vapours, powders, gas.

Espiral de acero / Steel spiral reinforcement

Tejido de poliéster recubierto de TPU autoextinguible
Flame resistant TPU coated polyester fabric

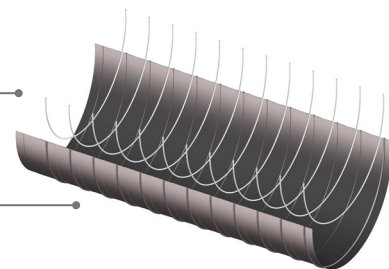

Ficha técnica / Technical data

Código	Ø Int.	Peso	R. de curvatura	Lg. Rollo	Vol.
Code	Ø Int.	Weight	Bending	Coil lgth.	Vol.
	mm/inch	g/m	mm	m	m³
H101040000000	40*	125	20	10	0,002
H101045000000	45*	140	23	10	0,002
H101051000000	51*	150	26	10	0,003
H101055000000	55*	165	28	10	0,003
H101060000000	60*	175	30	10	0,004
H101063000000	63*	185	32	10	0,004
H101065000000	65*	190	33	10	0,005
H101070000000	70*/2. 3/4"	185	35	10	0,005
H101076000000	76*	200	38	10	0,006
H101080000000	80*	210	40	10	0,007
H101082000000	82*	215	41	10	0,007
H101090000000	90*	240	45	10	0,009
H101102000000	102*/4"	310	51	10	0,011
H101107000000	107*	325	54	10	0,012
H101110000000	110*	330	55	10	0,013
H101115000000	115*	345	58	10	0,014
H101120000000	120*	360	60	10	0,015
H101127000000	127*/5"	385	64	10	0,017
H101130000000	130*	390	65	10	0,018
H101140000000	140*	420	70	10	0,021
H101152000000	152*/6"	460	76	10	0,024
H101160000000	160*	470	80	10	0,027
H101163000000	163*	475	82	10	0,028
H101180000000	180*	525	90	10	0,034
H101203000000	203*/8"	595	102	10	0,043
H101220000000	220*	640	110	10	0,050
H101228000000	228*	665	114	10	0,054
H101254000000	254*/10"	910	127	10	0,067
H101279000000	279*	1000	140	10	0,080
H101305000000	305*/12"	1095	153	10	0,096
H101315000000	315*	1130	158	10	0,102
H101330000000	330*	1180	165	10	0,112
H101356000000	356*/14"	1275	178	10	0,130
H101406000000	406*	1455	203	10	0,236
H101500000000	500*	2015	250	10	0,357
H101505000000	505*	2035	253	10	0,364

*Disponible bajo demanda. Consulte con ventas para más información y cantidades / *Available on request, contact our sales office for more info and quantities

Los datos técnicos aquí reportados fueron medidos a 23°C con 50% de humedad / The technical data here reported were measured at 23°C with 50% humidity