


VULCANO® M FR

(Cod. VM FR)



SISTEMA DE CONEXIÓN
CONNECTION SYSTEM
SUGGESTED

Abrazaderas doble puente W2
Double bridge W2



Cód. F2 W2 - Ø 76-400


Tubo translucido de TPU a base éster, reforzado con una espiral de acero recubierta de TPU de color cobre para asegurar la máxima adhesión con la pared; flexibilidad elevada, maneable, ligero y comprimible (5:1). Óptima resistencia a la abrasión, a los aceites minerales, al ozono, al envejecimiento y a los agentes atmosféricos. Antiestática ($R < 10^2$ Ohm/m) conectando la espiral a tierra.

• Industria de la madera para aspiración de serrín, polvos abrasivos, y donde sea necesaria una alta flexibilidad incluso a bajas temperaturas.

Translucent ester based TPU duct reinforced with copper colored TPU high adhesion steel spiral. Wall thickness from 0,4 mm to 0,75 mm. Maximum flexibility, high compressibility (about 5:1) and lightness make this duct an excellent choice for cost saving storage and transport and easy handling in operation. Resistant to abrasion, mineral oils, UV, ozone and ageing. Especially suitable for dynamic applications. The TPU-coated spiral allows more bending sessions than a hose with a not coated steel spiral. It can be made conductive ($R < 10^2$ Ohm/m) by grounding the spiral.

• Suction of pellets, granulates, abrasive powders and chemicals. In woodworking and ceramic industry and everywhere very high flexibility is required, even at low temperatures.

Espiral de acero cobreado recubierta de TPU
TPU coated copper colored steel spiral

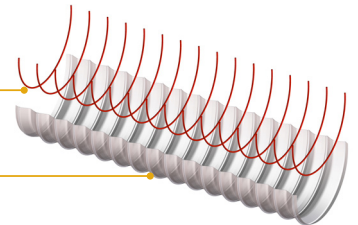

TPU a base de éster / Ester based TPU hose

Ficha técnica / Technical data

Código	Ø int.	Min esp.	Peso	Vacio	R. de curvatura	Lg. Rollo	Vol.	Abrazaderas doble puente W2	JP
Code	Ø Int.	Min wall th.	Weight	Vac.	Bending	Coil lgth.	Vol.	Double bridge W2	
	mm/inch	mm	g/m	mm	m H ₂ O	m	m ³		
VMFR025000000	25*	0,40	140	2,0	30	20	0,05	-	
VMFR032000000	32	0,40	175	2,0	30	20	0,06	-	
VMFR038000000	38	0,40	180	2,0	30	20	0,09	-	
VMFR040000000	40	0,40	190	2,0	32	20	0,09	-	
VMFR045000000	45*	0,40	210	2,0	36	20	0,10	-	
VMFR050000000	50*	0,40	230	2,0	40	20	0,11	-	
VMFR051000000	51	0,40	235	2,0	40	20	0,11	-	
VMFR055000000	55*	0,40	250	2,0	40	20	0,12	-	
VMFR060000000	60	0,40	270	1,7	50	20	0,13	-	
VMFR063000000	63	0,40	280	1,7	55	20	0,19	-	
VMFR065000000	65*	0,40	290	1,7	56	20	0,19	-	
VMFR070000000	70/2.3/4"	0,43	380	1,7	60	20	0,20	-	
VMFR075000000	75*	0,43	405	1,7	65	20	0,22	-	
VMFR076000000	76	0,43	410	1,7	65	20	0,22	-	
VMFR080000000	80	0,43	430	1,6	65	20	0,23	F2 W2 076.0 090.0	10 m
VMFR090000000	90	0,43	480	1,6	75	20	0,29		
VMFR100000000	100*	0,53	540	1,3	85	15	0,32		
VMFR102000000	102/4"	0,53	550	1,3	85	15	0,32		10/15 m
VMFR110000000	110	0,53	590	1,2	90	15	0,35		
VMFR120000000	120	0,53	640	1,0	100	15	0,37	F2 W2 100.0 127.0	10 m
VMFR122000000	122*	0,53	650	1,0	100	15	0,38		
VMFR127000000	127/5"	0,63	765	1,0	105	15	0,39		10 m
VMFR130000000	130*	0,63	780	0,8	105	15	0,40		
VMFR140000000	140	0,63	840	0,8	115	15	0,65		
VMFR150000000	150*	0,63	895	0,8	125	15	0,69		
VMFR152000000	152/6"	0,63	910	0,8	125	15	0,70	F2 W2 130.0 190.0	
VMFR160000000	160	0,63	955	0,7	130	15	0,73		
VMFR180000000	180	0,63	1235	0,5	150	15	0,97		
VMFR200000000	200*	0,63	1365	0,4	165	15	1,08		
VMFR203000000	203/8"	0,63	1385	0,4	165	15	1,09	F2 W2 200.0 230.0	10 m
VMFR228000000	228*	0,63	1550	0,4	185	10	1,22		
VMFR250000000	250*	0,65	1845	0,4	210	10	1,33		
VMFR254000000	254/10"	0,65	1875	0,4	210	10	1,35		
VMFR265000000	265*	0,65	1955	0,4	220	10	1,41		
VMFR279000000	279*	0,65	2055	0,4	230	10	1,48	F2 W2 250.0 330.0	
VMFR305000000	305/12"	0,65	2245	0,3	250	10	1,61		
VMFR315000000	315*	0,65	2315	0,3	275	10	1,66		
VMFR325000000	325*	0,65	2390	0,3	275	10	1,72		
VMFR356000000	356*/14"	0,65	2610	0,3	300	10	0,335	F2 W2 350.0 410.0	
VMFR406000000	406*	0,75	3210	0,3	350	10	0,433		

*Disponible bajo demanda. Consulte con ventas para más información y cantidades / *Available on request, contact our sales office for more info and quantities

Los datos técnicos aquí reportados fueron medidos a 23°C con 50% de humedad / The technical data here reported were measured at 23°C with 50% humidity

JP disponible en stock / available on stock