


VULCANO® ZR (Cod. ZR)



SISTEMA DI CONNESSIONE
CONNECTION SYSTEM
SUGGESTED

Fascetta doppio ponte W2
Double bridge W2



Cod. F2 W2 - Ø 76-400

Tubo trasparente in TPU a base estere rinforzato con spirale in acciaio ramato. Spessore da 0.35 mm a 0.50 mm. Ottima flessibilità e comprimibile (circa 5:1) per un facile trasporto e stoccaggio. Può essere reso conduttivo ($R < 10^2$ Ohm/metro) mettendo a terra la spirale. Buona resistenza ad abrasione, flessione, olii minerali, invecchiamento, agenti atmosferici ed ozono.

• Falegnameria e industria del legno, depolverizzazione, piccoli aspiratori industriali e per impianti di aspirazione leggera di materiale abrasivo; impiegato come guaina di protezione


Transparent ester based TPU duct reinforced with a copper coloured steel spiral. Wall thickness from 0,35 to 0,50 mm. Very flexible and axially compressible (about 5:1) for easy handling and cost effective stocking and transporting. It can be conductive ($R < 10^2$ Ohm/metre) by grounding the spiral. Resistant to abrasion, ageing, ozone and atmospherical agents.

Good resistance to abrasion, ageing, mineral oils, ozone and atmospherical agents.

• Woodworking, dedusting, small industrial cleaning and light suction plants; used as protection sleeve

Spirale in acciaio ramato / Copper plated steel spiral

TPU a base estere / Ester based TPU hose

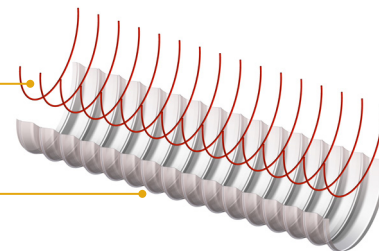

Scheda tecnica / Technical data

Codice	Ø Int.	Spess. Min.	Peso	Depr.	R. Curvatura	Lg. Rotolo	Vol.	Fascetta doppio ponte W2	JP
Code	Ø Int.	Min wall th.	Weight	Vac.	Bending	Coil lgth.	Vol.	Double bridge W2	
	mm/inch	mm	g/m	m H ₂ O	mm	m	m ³		
ZR010400000000	40*	0,35	160	0,4	20	20	0,09	-	
ZR010500000000	50	0,35	195	0,4	25	20	0,11	-	
ZR010600000000	60	0,35	240	0,4	30	20	0,13	-	
ZR010630000000	63	0,35	250	0,4	32	20	0,18	-	
ZR010650000000	65*	0,35	260	0,4	33	20	0,19	-	
ZR010700000000	70/2.3/4"	0,35	360	0,4	35	20	0,2	-	
ZR010760000000	76	0,35	385	0,4	38	20	0,22	-	
ZR010800000000	80	0,35	405	0,4	40	20	0,23	F2 W2 076.0 090.0	10/20 m
ZR010820000000	82*	0,35	415	0,4	41	20	0,23		
ZR010900000000	90	0,35	455	0,4	45	20	0,29		
ZR011000000000	100	0,35	510	0,3	50	15	0,48		10/15 m
ZR011020000000	102/4"	0,4	520	0,3	51	15	0,48		
ZR011040000000	104*	0,4	530	0,3	52	15	-	F2 W2 100.0 127.0	
ZR011100000000	110	0,4	560	0,3	55	15	0,52		
ZR011150000000	115*	0,4	580	0,25	58	15	-		
ZR011200000000	120	0,4	605	0,25	60	15	0,56		10/15 m
ZR011270000000	127/5"	0,4	640	0,25	64	15	0,59		
ZR011300000000	130	0,4	660	0,2	65	15	0,61		
ZR011400000000	140	0,4	710	0,2	70	15	0,66		
ZR011500000000	150	0,4	755	0,2	75	15	0,7	F2 W2 130.0 190.0	10/15 m
ZR011520000000	152/6"	0,4	765	0,2	76	15	0,71		
ZR011600000000	160	0,45	895	0,15	80	15	0,75		
ZR011750000000	175*	0,45	975	0,15	88	15	0,82		
ZR011800000000	180	0,45	1005	0,15	90	15	0,84		
ZR012000000000	200	0,45	1110	0,1	100	15	1,1		10/15 m
ZR012030000000	203*/8"	0,45	1125	0,1	102	15	1,11	F2 W2 200.0 230.0	
ZR012200000000	220	0,45	1215	0,1	110	15	1,2		
ZR012250000000	225*	0,45	1240	0,1	113	15	1,22		
ZR012280000000	228*	0,45	1260	0,1	114	10	1,24		
ZR012500000000	250	0,5	1310	0,1	125	10	0,154		
ZR012540000000	254*/10"	0,5	1330	0,1	127	10	0,159		
ZR012790000000	279*	0,5	1460	0,08	140	10	0,19	F2 W2 250.0 330.0	
ZR013000000000	300	0,5	1565	0,08	150	10	0,218		
ZR013050000000	305*/12"	0,5	1590	0,08	153	10	0,225		
ZR013150000000	315*	0,5	1640	0,08	158	10	0,24		
ZR013250000000	325*	0,5	1690	0,07	163	10	0,254		
ZR013500000000	350*	0,5	1815	0,07	175	10 m compr.	0,293	F2 W2 350.0 410.0	
ZR014000000000	400*	0,5	2125	0,06	200	10 m compr.	0,379		
ZR014500000000	450*	0,5	2640	0,06	225	6 m compr.	0,347		
ZR015000000000	500*	0,5	2925	0,06	250	6 m compr.	0,426	-	

*Disponibile su richiesta, per quantitativi da concordare con l'ufficio vendite / *Available on request, contact our sales office for more info and quantities

I dati tecnici qui riportati sono stati misurati a 23°C e al 50% di umidità / The technical data here reported were measured at 23°C with 50% humidity

JP disponibile a magazzino / available on stock