



Since 1975

# VULCANO PU 04 ETERE

New!



+90°C  
-40°C

**Transparent ether based TPU hose, reinforced with a high adhesion TPU coated zinc plated steel spiral.**

The wall material is permanent antistatic ( $R<10^9$  Ohm/m).


Constant wall thickness of 0,40 mm throughout the range.

Excellent resistance to abrasion and flexion as well as to Hydrolysis and microbes. Axially compressible (5:1)

Foodgrade UE 10/2011(classes A, B, C, D2, E) and FDA CFR 21-Item 177.2600. Suitable for conveying fatty food

- **Food industry:** light suction and delivery of abrasive powders, flours and dry food

COD.VE

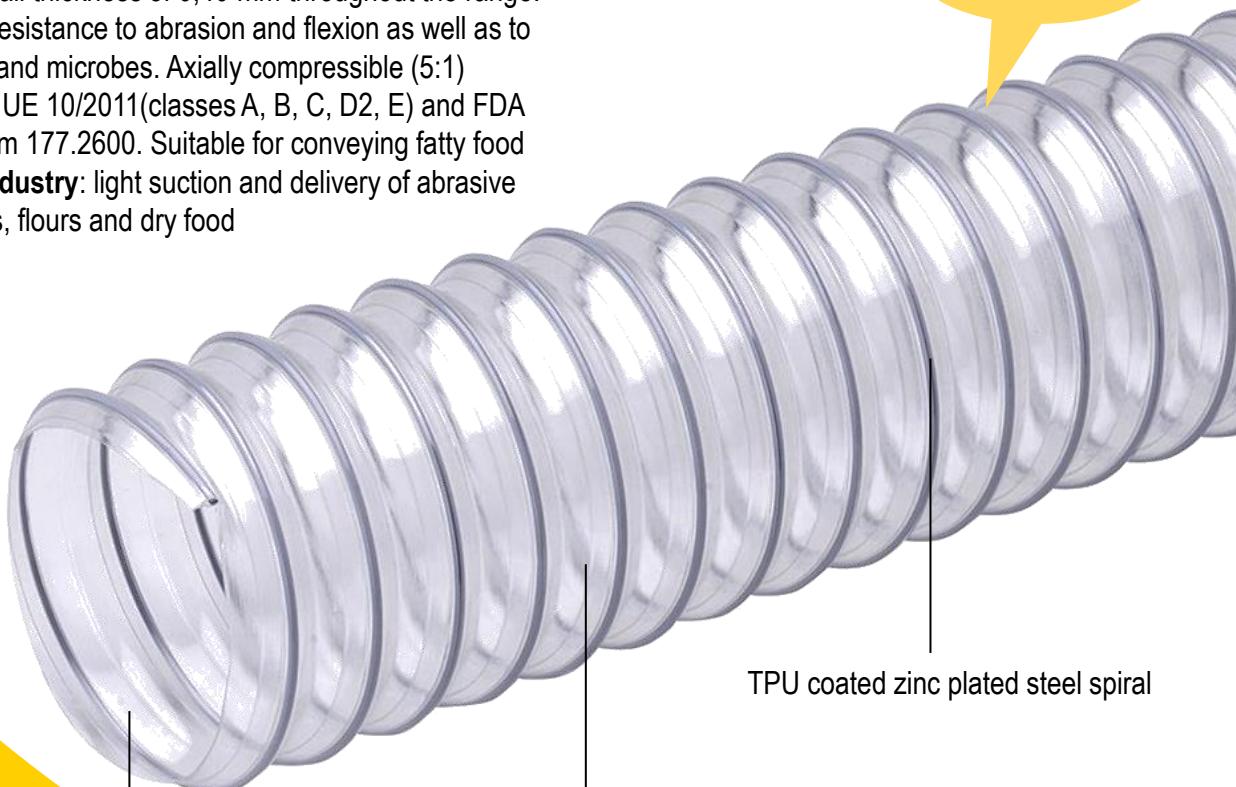

Clear sidewall for an easier visual detection

