

VULCANO® PVC AF (Cod. VP 04)



Tubo de PVC de color negro, con espiral de refuerzo de acero. Interno y externo ligeramente corrugado. El tubo especial, es auto-extinguible según la UL 94-V0. El espesor de la pared es constante de 0,6 mm. Extremadamente flexible, ofrece radios de curvatura extremos. Resistente a los rayos UV, a los agentes atmosféricos y a numerosas sustancias químicas. Antiestática ($R < 10^2$ Ohm/m) conectando la espiral a tierra.

- Ventilación y acondicionamiento industrial: aspiración de aire, humos y gases.

Black PVC-P hose, reinforced with a steel spiral. Slightly corrugated inside and outside. This hose is **flame retardant** according to UL 94 V0. Constant wall thickness 0,6 mm.

Thanks to its high mechanical features, it can be used in many applications, especially when good dynamic properties are required: flexible, light, easy to handle, really good bending.


Good resistance to most chemicals, ozone, UV rays, weather conditions and ageing. The hose can be conductive ($R < 10^2$ Ohm/m) by grounding the spiral.

- Ventilation and air conditioning systems, fumes and dust extraction, suction of vapours and gases.



Espiral de acero / Steel spiral

Tubo de PVC-P / PVC hose

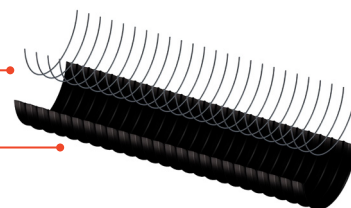

Ficha técnica / Technical data

Código	Ø Int.	Min esp.	Peso	Vacio	R. de curvatura	Lg. Rollo	Vol.
Code	Ø Int.	Min wall th.	Weight	Vac.	Bending	Coil lgth.	Vol.
	mm/inch	mm	g/m	m H ₂ O	mm	m	m ³
VP040760000000	76*	0,6	570	1,7	65	20	0,22
VP041020000000	102*/4"	0,6	725	1,3	90	15	0,33
VP041100000000	110*	0,6	780	1,3	95	15	0,35
VP041270000000	127*/5"	0,6	885	1	110	15	0,40
VP041500000000	150*	0,6	1045	0,8	130	15	0,71
VP042030000000	203*/8"	0,6	1475	0,4	175	15	1,11
*Disponible bajo demanda. Consulte con ventas para más información y cantidades / *Available on request, contact our sales office for more info and quantities							
Los datos técnicos aquí reportados fueron medidos a 23°C con 50% de humedad / The technical data here reported were measured at 23°C with 50% humidity							