



IT

Tubo trasparente in TPU a base estere rinforzato con spirale in acciaio zincato. Spessore da 0,35 mm a 0,50 mm. Ottima flessibilità e comprimibile (circa 5:1) per un facile trasporto e stoccaggio.

Buona resistenza ad abrasione, flessione, olii minerali, invecchiamento, agenti atmosferici, raggi UV ed ozono. Può essere reso conduttivo ($R < 10^2 \text{ Ohm/m}$) mettendo a terra la spirale.

• Falegnameria e industria del legno, depolverizzazione, piccoli aspiratori industriali e per impianti di aspirazione leggera di materiale abrasivo; impiegato come guaina di protezione.

EN


Transparent ester-based TPU hose reinforced with zinc-plated steel spiral. Thickness from 0,35 mm to 0,50 mm. Very flexible and compressible (approx. 5:1) for easy transport and storage.

Good resistance to abrasion, bending, mineral oils, ageing, weathering, UV rays and ozone. Can be made conductive ($R < 10^2 \text{ Ohm/m}$) by earthing the spiral.

• Woodworking and carpentry, dedusting, small industrial vacuum cleaners and for light suction of abrasive material; used as a protective sleeve.

COD. VZ

Ø mm 40 - 500

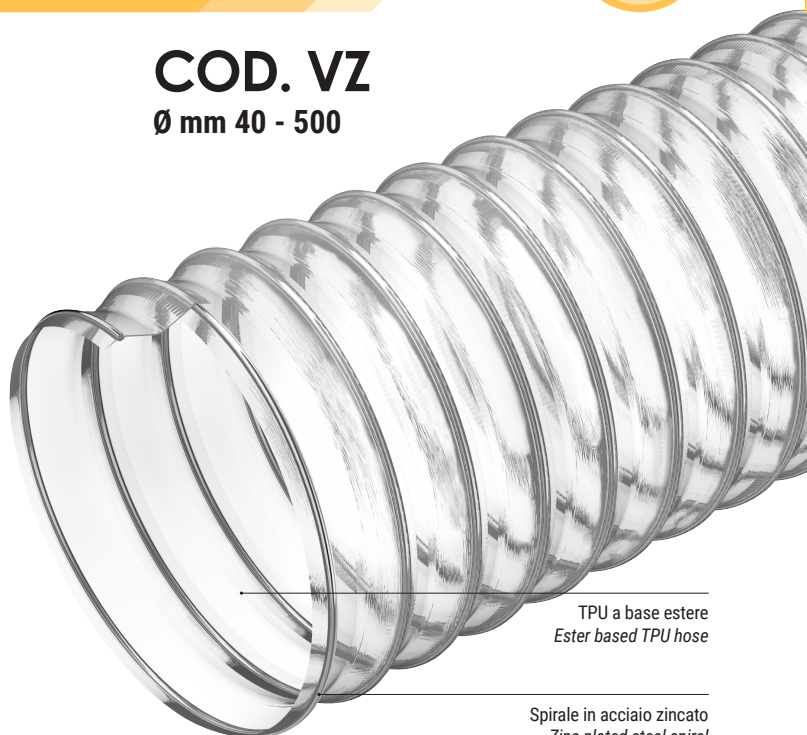

TPU a base estere
Ester based TPU hose

Spirale in acciaio zincato
Zinc plated steel spiral

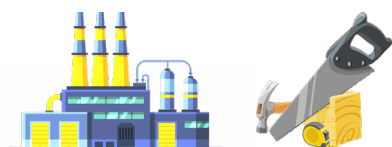



TABELLA TECNICA - TECHNICAL DATA		CODICE	Ø INT.	SPESS. MIN.	PESO	DEPR.	R. CURVATURA	LG. ROTOLO	VOL.	FASCETTA DOPPIOPONTE W2
		CODE	Ø INT.	MIN WALL TH.	WEIGHT	VACUUM	BENDING	COIL LGTH.	VOL.	DOUBLE BRIDGE W2
			mm/inch	mm	g/m	m H ₂ O	mm	m	m ³	
 disponibile a magazzino available on stock		VZ010400000000*	40	0,35	185	0,40	20	20	0,09	-
		VZ010500000000*	50	0,35	225	0,40	25	20	0,11	-
		VZ010510000000	51	0,35	230	0,40	26	20	0,11	-
		VZ010600000000	60	0,35	275	0,40	30	20	0,13	-
		VZ010630000000	63	0,35	285	0,40	32	20	0,18	-
		VZ010650000000*	65	0,35	295	0,40	33	20	0,19	-
		VZ010700000000	70	0,35	360	0,40	35	20	0,20	-
		VZ010760000000	76	0,35	385	0,40	38	20	0,22	F2 W2 076.0 090.0
		VZ010800000000	80	0,35	405	0,40	40	20	0,23	
		VZ010820000000*	82	0,35	415	0,40	41	20	0,23	
 F2 W2 p.122 Fascetta doppioponte W2 / Double bridge W2		VZ010900000000	90	0,35	455	0,40	45	20	0,29	F2 W2 100.0 127.0
		VZ011000000000	100	0,40	510	0,30	50	15	0,32	
		VZ011020000000	102	0,40	520	0,30	51	15	0,32	
		VZ011040000000*	104	0,40	530	0,30	52	15	0,33	
		VZ011100000000	110	0,40	560	0,30	55	15	0,35	
		VZ011200000000	120	0,40	605	0,25	60	15 (JP 10/15)	0,37	F2 W2 130.0 190.0
		VZ011270000000	127	0,40	640	0,25	64	15	0,39	
		VZ011300000000	130	0,40	660	0,20	65	15	0,41	
		VZ011400000000	140	0,40	710	0,20	70	15	0,66	
		VZ011500000000	150	0,40	755	0,20	75	15	0,70	
		VZ011520000000	152	0,40	765	0,20	76	15	0,71	
		VZ011600000000	160	0,45	895	0,15	80	15	0,75	
 VULCANO ZR (cod. ZR) p.15		VZ011650000000*	165	0,45	925	0,15	83	15	0,77	F2 W2 200.0 230.0
		VZ011700000000*	170	0,45	950	0,15	85	15	0,94	
		VZ011800000000	180	0,45	1005	0,15	90	15	0,99	
		VZ012000000000	200	0,45	1110	0,10	100	15	1,10	
		VZ012030000000	203	0,45	1125	0,10	102	15	1,11	
		VZ012100000000*	210	0,45	1160	0,10	105	10	0,110	F2 W2 250.0 330.0
		VZ012200000000	220	0,45	1215	0,10	110	10	0,120	
		VZ012280000000*	228	0,45	1260	0,10	114	10	0,129	
		VZ012500000000	250	0,50	1310	0,10	125	10 m compr.	0,154	
		VZ012540000000	254	0,50	1330	0,10	127	10 m compr.	0,159	
*Disponibile su richiesta, per quantitativi da concordare con l'ufficio vendite. *Available on request, contact our sales office for more info and quantities.		VZ012790000000*	279	0,50	1460	0,08	140	10 m compr.	0,190	F2 W2 350.0 410.0
		VZ013000000000	300	0,50	1565	0,08	150	10 m compr.	0,218	
		VZ013050000000	305	0,50	1590	0,08	153	10 m compr.	0,225	
		VZ013150000000*	315	0,50	1640	0,07	158	10 m compr.	0,240	
		VZ013500000000	350	0,50	1815	0,07	175	10 m compr.	0,293	
		VZ014000000000	400	0,50	2125	0,06	200	10 m compr.	0,379	-
		VZ014500000000*	450	0,50	2640	0,06	225	6 m compr.	0,347	
		VZ015000000000*	500	0,50	2925	0,06	250	6 m compr.	0,426	